




Product specification

HUGHES HE240 4.3-10 Male To 4.-10 Male

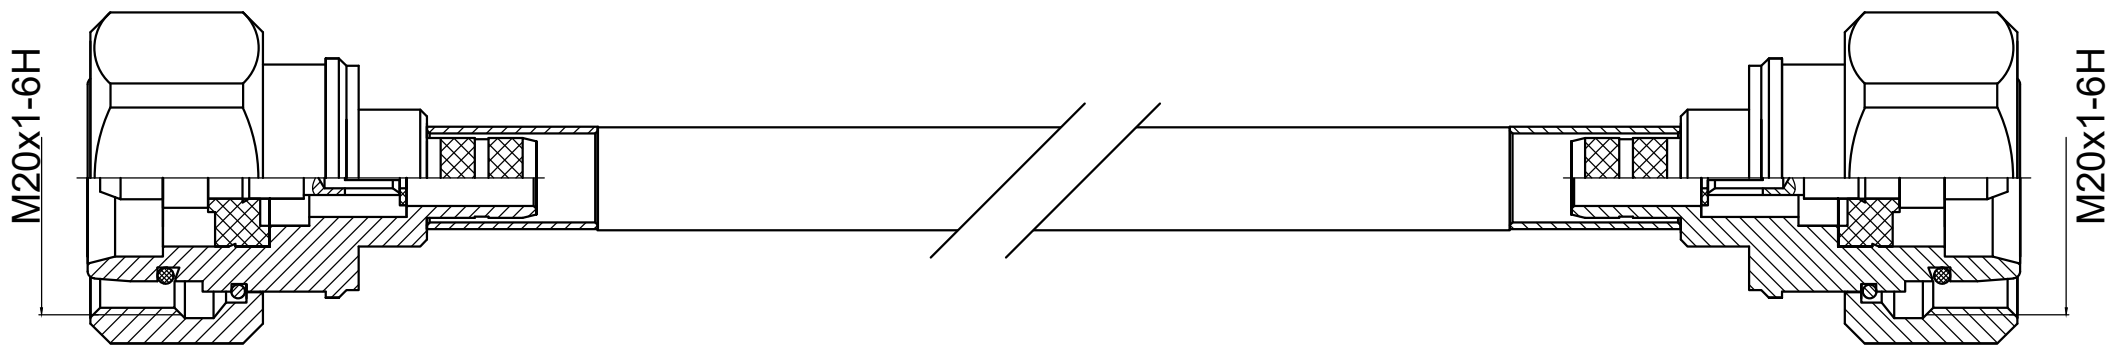

Description

Hughes coaxial jumper assembly on HE240 cable terminated with 4.3-10 Male connector on both ends.

Specification

General Specifications	
Cable Type	HE240
Center Conductor	Copper
Dielectric	Physical Foam Polyethylene PE
Outer Conductor	Bonded Aluminium/Polyester/Aluminium tape + TC Wire Braiding
Outer Conductor Coverage	90%
Jacket	LSZH
Jacket Diameter	6.10 ± 0.15mm
Connector Type	2x 4.3-10 Male
Inner Conductor	Phosphor, Bronze, Silver Plating
Body	Brass, Tri-metal Plating
Other metal parts	Brass, Nickel Plating
Gasket	Silicone Rubber
Electrical Specifications	
Impedance	50 ± 2Ω
Frequency Range	0~6GHz
Insulation Resistance	>5000 MΩ.km
Dielectric Withstanding Voltage (AC)	1.5KV
VSWR	≤1.25 (0-3GHz) ≤1.3 (3-6GHz)
Environmental & Mechanical Specifications	
Operating Temperature	-40°C~+85°C
RoHS	Compliant

The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informative purposes only and are subject to change

Hughes Electronics Ltd
Unit G, Southwark Business Center,
Ayres Street, London, SE1 1ES, UK
Co. No. 2827242 VAT No. 653 5771 17

Tel: (44) 020 7378 1400
Fax: (44) 020 7378 1434
email: sales@hugheselectronics.co.uk
web: www.hugheselectronics.co.uk



Making Good Ideas Happen