




Product specification

HUGHES HE240 4.3-10 Male TO QMA Male

25-1L1I1AGO/XXHE

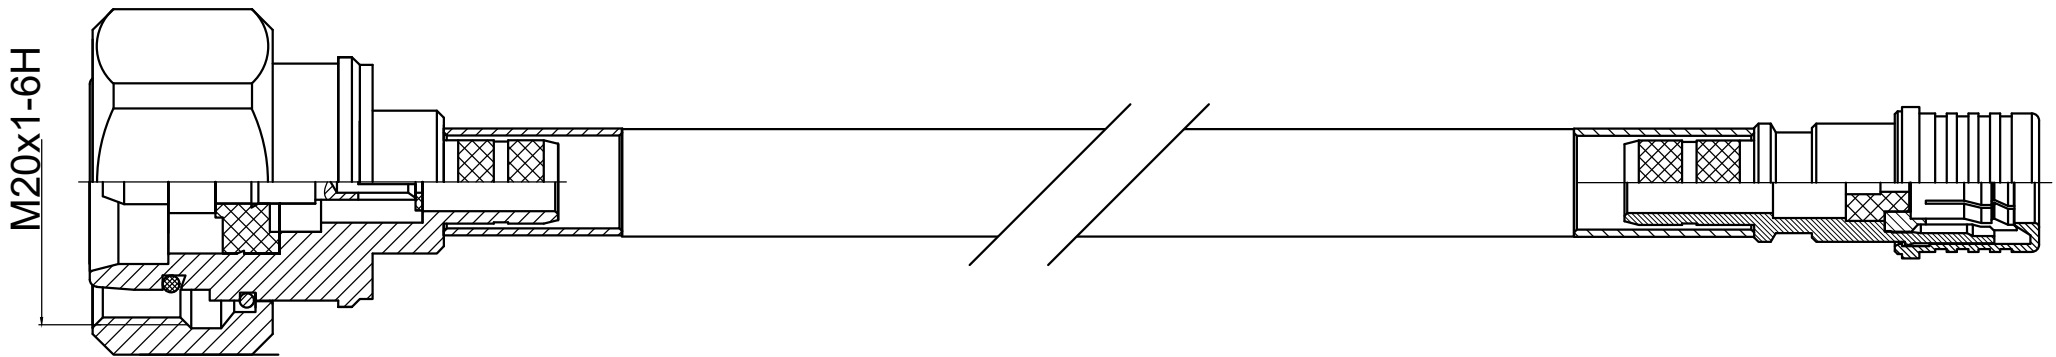

Description

Hughes coaxial jumper assembly on HE240 cable terminated with 4.3-10 Male connector on end 1 and QMA Male connector on end 2.

Specification

General Specifications		
Cable Type	HE240	
Center Conductor	Copper	
Dielectric	Physical Foam Polyethylene PE	
Outer Conductor	Bonded Aluminium/Polyester/Aluminium tape + TC Wire Braiding	
Outer Conductor Coverage	90%	
Jacket	LSZH	
Jacket Diameter	6.10 ± 0.15mm	
Connector Type	4.3-10 Male	QMA Male
Inner Conductor	Phosphor, Bronze, Silver Plating	Brass, Gold Plating
Body	Brass, Tri-metal Plating	Brass, Tri-metal Plating
Other metal parts	Brass, Nickel Plating	Brass, Nickel Plating
Gasket	Silicone Rubber	N/A
Electrical Specifications		
Impedance	50 ± 2Ω	
Frequency Range	0~6GHz	
Insulation Resistance	>5000 MΩ.km	
Dielectric Withstanding Voltage (AC)	1.5KV	
VSWR	≤1.25 (0-3.6GHz)	
Environmental & Mechanical Specifications		
Operating Temperature	-40°C~+85°C	
RoHS	Compliant	

The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informative purposes only and are subject to change

Hughes Electronics Ltd
Unit G, Southwark Business Center,
Ayres Street, London, SE1 1ES, UK
Co. No. 2827242 VAT No. 653 5771 17

Tel: (44) 020 7378 1400
Fax: (44) 020 7378 1434
email: sales@hugheselectronics.co.uk
web: www.hugheselectronics.co.uk



Making Good Ideas Happen